



A.W.T. World Trade, Inc.

4321 N. Knox Ave.  
Chicago, IL  
60641  
773-777-7100  
Fax: 773-777-0909  
sales@awt-gpi.com


# CONVEY-ALL™

**A.W.T. World Trade, Inc.'s conveyor systems are engineered for high quality, high speed production. The chassis is solid, tough steel and the Fiberlon™ belt is strong and durable. They are ideal for conveying glass, wood, metal, plastic, bottles, cans, sheets, carpet, medical products, plastics and thousands of other applications.**

**E**asily adjustable solid state belt speed controls, standard conveyor length is 10' long with widths of 24" (61cm), 36" (91cm) 48" (122cm), 60" (152cm) and 72" (183cm). Larger sizes are available in any length. Optional vacuum holddown and exhaust system firmly holds each sheet on the belt, preventing it from rolling over, while at the same time exhausting fumes as needed.

## Standard Specifications

- Infinitely variable, solid state belt speed control speeds from 10 to 100 fpm (3 to 30 meters per minute). Other belt speeds are optional.
- Easily adjustable production controls with digital readout of exact belt speed.
- Strong and durable, black high-tempered Fiberlon™ Teflon belts. Hundreds of other belt types are available for your specific applications.
- Conveyor is in any length, in widths of 24" (61cm), 36" (91cm), 48" (122cm), 60" (152cm) and 72" (183cm). Other sizes are available.
- Easy installation, simple plug into a standard 115VAC single phase outlet. Other voltages available.

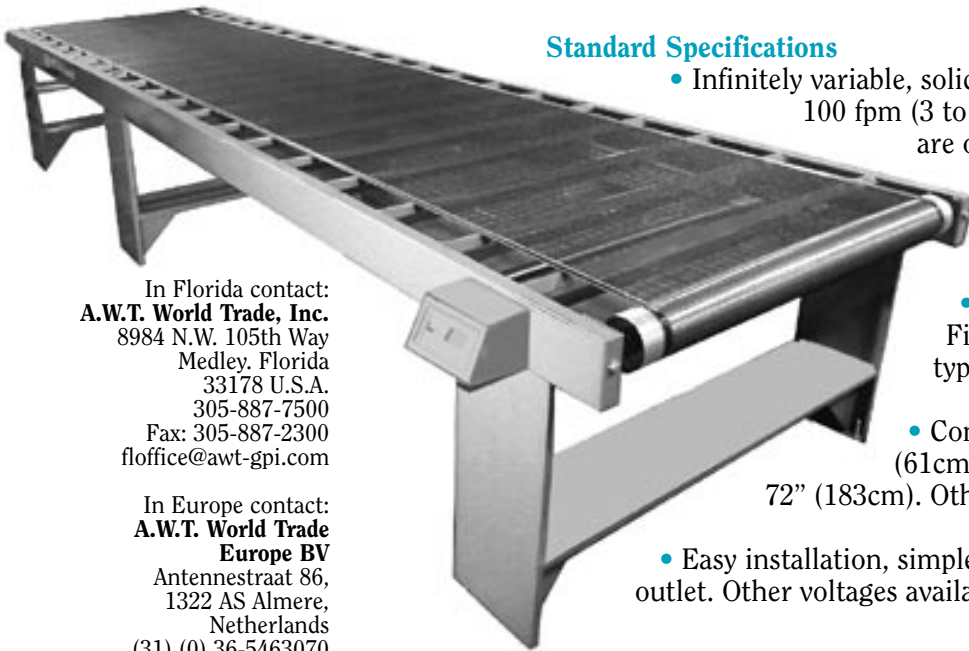

In Florida contact:  
**A.W.T. World Trade, Inc.**  
8984 N.W. 105th Way  
Medley, Florida  
33178 U.S.A.  
305-887-7500  
Fax: 305-887-2300  
floffice@awt-gpi.com

In Europe contact:  
**A.W.T. World Trade  
Europe BV**  
Antennestraat 86,  
1322 AS Almere,  
Netherlands  
(31) (0) 36-5463070  
Fax: (31) (0) 36-5463071  
info@awt-europe.com

©A.W.T. World Trade, Inc.  
No part of this literature  
may be produced without  
written permission

All specifications are  
subject to change

10/00

**A.W.T.**  
"Always  
Winning  
Technology"

## Accessories

- Vacuum exhaust system removes fumes etc.
- Hold down systems
- Hundreds of other belt types are available for your specific applications.
- Heavy duty, steel, plastic or other belting are available
- Different conveyor angles to meet the needs of any production line.
- Additional conveyor length, from 2 to 100 feet.
- Additional conveyor height for smooth transporting of stock or parts
- Lower or higher belt speeds