

DRY-IT™

Series of Screen Drying Cabinets



 4321 N. Knox Ave., Chicago IL, 60641

 www.awt-gpi.com

 sales@awtworldtrade.com

 773.777.7100  773.777.0909

A Division of the AWT World Trade Group

DRY-IT™

ADVANTAGES

- Horizontal and vertical models available
- Ten adjustable shelves
- Fully insulated to minimize energy costs
- Quickly reaches maximum temperature
- Clean, filtered air keeps debris out, limiting pinholes
- Digital temperature readout
- Standard temperatures to 120°F (49°C); higher temperatures available
- Heavy-duty steel construction
- All-stainless steel lining available
- Easy access for cleaning and servicing
- Heavy-duty casters for mobility

AWT's Dry-It Series of Screen Drying Cabinets features fully-enclosed, well-insulated units. The drying compartment quickly heats to the specified temperature, minimizing power consumption and operating costs. All Dry-It units include complete temperature controls with a standard temperature range up to 120°F (49°C); higher temperatures are available.

Filtered, heated air moves through the cabinet gently and evenly, from one side to the other. The heated, moisture-filled air is then forced out of the drying compartment. No moisture is recycled back into the unit. Screens are dried evenly and remain dust-free.

Dry-it units are available in both Horizontal and Vertical models to accommodate a range of production environments. All units feature steel construction and heavy-duty casters for workshop mobility. An optional all-stainless steel lining is available.



Vertical models available

A Company with
proven experience.



AWT
World Trade Inc.

Products
you can trust.


DRY-IT™

Standard Features

- Digital temperature readout
- Air-intake filter
- Fully insulated cabinet
- Exhaust removes moisture
- Standard temperature up to 120°F (49°C)
- Heavy-duty casters

Options and Accessories

- Double-sided brackets for smaller frames (available on horizontal models only)
- All-stainless steel lining
- High-temperature models - up to 140°F (60°C)
- Spare parts package

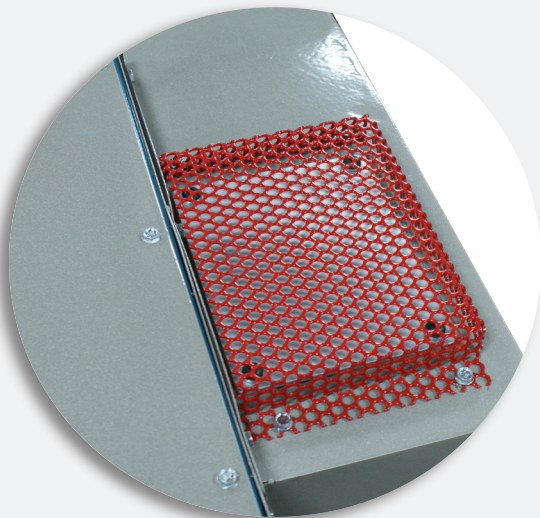

Filtered, heated air moves evenly through chamber.



Filtered air helps keep screens dust and pin-hole free.



Digital temperature control readout.



Specifications

Horizontal models

CAT. NO.	NUMBER OF DOORS	MAXIMUM FRAME O.D.	OVERALL DIMENSIONS H* x W x D	ELECTRICAL	AMPS
DC-3038	Single Door	30 x 38" (76 x 97cm)	46 x 38 x 48" (117 x 97 x 122cm)	115V, 1Ph, 60Hz	13.5
DC-3038-220	Single Door	30 x 38" (76 x 97cm)	46 x 38 x 48" (117 x 97 x 122cm)	220V, 1Ph, 50/60Hz	8
DC-5259-220	Double Door	52 x 59" (132 x 150cm)	46 x 61 x 70" (117 x 155 x 178cm)	220V, 1Ph, 50/60Hz	16
DC-5473-220	Double Door	54 x 73" (137 x 185cm)	46 x 67 x 90" (117 x 170 x 228cm)	220V, 1Ph, 50/60Hz	16

Vertical models

CAT. NO.	NUMBER OF DOORS	MAXIMUM FRAME O.D.	OVERALL DIMENSIONS H x W x D	ELECTRICAL	AMPS
DC-5259V-220	Double Door	52 x 59" (132 x 150cm)	43 x 64 x 70" (109 x 163 x 178cm)	220V, 1Ph, 50/60Hz	16

THE AWT WORLD TRADE GROUP

Combining state-of-the art engineering expertise and creativity with outstanding customer service to provide quality, consistency, and value to the screen printing industry for more than 40 years



AWT
World Trade Inc.
awt-gpi.com



Saturn
Rack™

dryingandstorageracks.com



GRAPHIC PARTS
INTERNATIONAL INC.
gpiparts.com



American

awt-gpi.com



GENERAL CYLINDER PRESSES
generalcylinderpresses.com

©2025 AWT World Trade, Inc. No part of this literature may be reproduced without written permission. Specifications subject to change without notice. #LIT-423 1/9/25



sales@awtworldtrade.com



www.awt-gpi.com



773.777.7100



773.777.0909