


KLEEN-VIEW™

Washout Sink and Stand



Model-KV130SS
Shown with optional
storage shelf

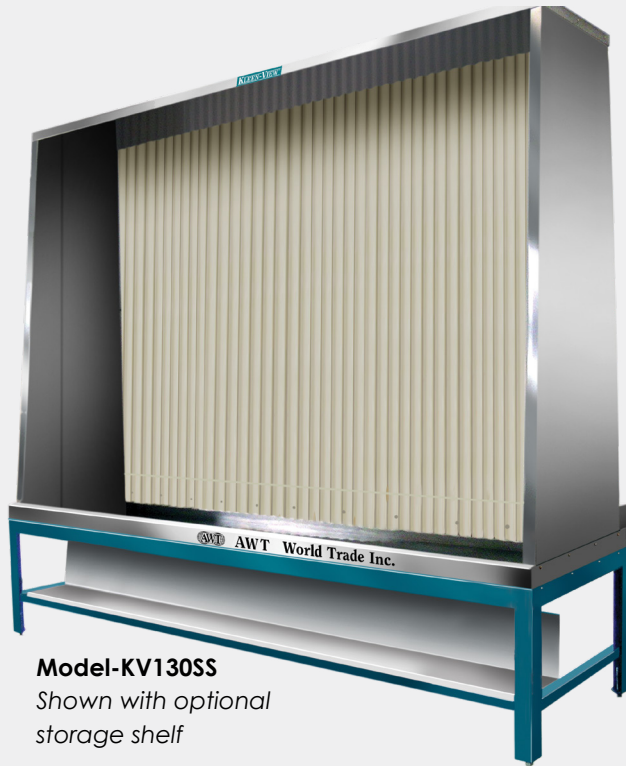


Model-KV58SS
Shown with optional storage
shelf and frame




 4321 N. Knox Ave., Chicago IL, 60641

 sales@awtworldtrade.com

 www.awt-gpi.com

 773.777.7100

 773.777.0909

A Division of the AWT World Trade Group

KLEEN-VIEW™

Washout Sink and Stand



Translucent fiberglass back panel

The corrugated shape directs water and chemicals away, preventing splashback on the operator.

Shown with optional storage shelf

ADVANTAGES

- Quick identification of pinholes and residue
- Simplifies and speeds up screen reclaiming process
- Works with daylight or artificial light sources
- Reduces mesh and labor costs
- Isolates cleanup process
- Improves worker safety
- Reduces potentially hazardous spillage
- Stainless steel construction

AWT's reliable Kleen-View™ Washout Sink and Stand is an essential component of the screen reclaiming process and a vital tool for maximizing screen room productivity. Designed for use with our Power-King™ or other pressure washing systems, Kleen-View units are ideal for degreasing mesh, removing inks, and reclaiming screens for reuse.

The translucent fiberglass back panel works with any light source to backlight screens, showing pinholes, unexposed emulsion, or residue. The extra-deep trough reduces backsplash, and the unit has a built-in exhaust outlet. Heavy-duty, stainless steel construction ensures years of reliable, rust-free service. Kleen-View units assemble and disassemble easily for mobility and convenience.

A Company with
proven experience.




AWT
World Trade, Inc.

Products
you can trust.

KLEEN-VIEW™

Washout Sink and Stand

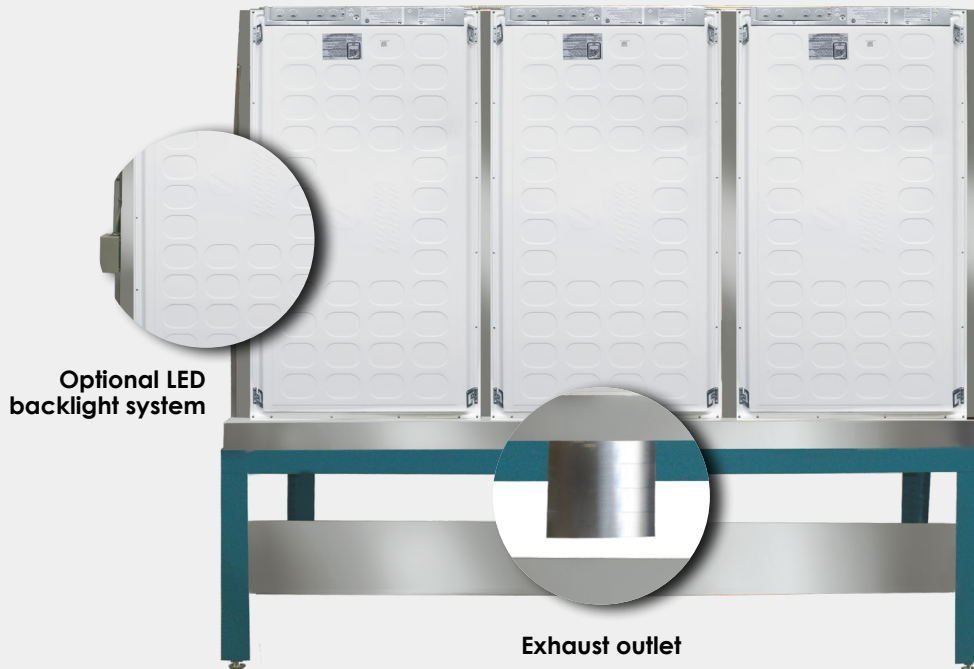

Features

- Heavy-duty, stainless steel construction
- High-impact, translucent fiberglass back panel
- Corrugated shape of back panel diverts caustic chemicals away from operator
- Extra-deep trough
- Exhaust outlet (except tabletop KV-32TPSS)

Options & Accessories

- Optional efficient LED backlighting systems* (for original equipment only, not available for retrofit)
- Automatic water-spray emulsion removal system
- Sturdy, full-size storage shelf (except tabletop units and oversize units)
- Power-King 2™ pressure washers
- Drain filters
- Oversize units and custom configurations available



Specifications

CAT. NO.	DESCRIPTION	MAX. FRAME SIZE	DIMENSIONS					
			A SINK WIDTH	B SINK HEIGHT	C LEG HEIGHT	D TOTAL HEIGHT	E SINK DEPTH	F TOTAL DEPTH
KV-32TPSS	Stainless-steel tabletop model sink with stand	26 x 26" (66 x 66cm)	33" (84cm)	32" (81cm)	10" (25cm)	42" (107cm)	21" (54cm)	23" (58cm)
KV-38SS	Stainless-steel floor model sink with stand	28 x 38" (71 x 97cm)	44" (112cm)	35" (89cm)	25" (64cm)	61" (155cm)	22" (54cm)	32" (81cm)
KV-58SS*		36 x 54" (91 x 137cm)	59" (150cm)	41" (105cm)	25" (64cm)	68" (173cm)	23" (58cm)	32" (81cm)
KV-80SS*		52 x 76" (132 x 193cm)	81" (206cm)	58" (148cm)	25" (64cm)	83" (211cm)	25" (64cm)	32" (81cm)
KV-100SS*		72 x 96" (183 x 244cm)	102" (260cm)	80" (203cm)	25" (64cm)	105" (267cm)	37" (94cm)	61" (155cm)
KV-130SS*		72 x 126" (183 x 320cm)	131" (333cm)	80" (203cm)	25" (64cm)	113" (288cm)	37" (94cm)	61" (155cm)
KV-130SS-2*		84 x 126" (213 x 320cm)	131" (333cm)	93" (233cm)	25" (64cm)	113" (288cm)	37" (94cm)	61" (155cm)
KV-180SS*		72 x 176" (183 x 447cm)	182" (463cm)	80" (203cm)	25" (64cm)	113" (288cm)	37" (94cm)	61" (155cm)
KV-180SS-2*		94 x 176" (239 x 447cm)	182" (463cm)	104" (264cm)	25" (64cm)	124" (315cm)	37" (94cm)	61" (155cm)

*LED Backlight option available - 110V, 1PH, 60Hz; shelf option also available

THE AWT WORLD TRADE GROUP

Combining state-of-the art engineering expertise and creativity with outstanding customer service to provide quality, consistency, and value to the screen printing industry for more than 40 years



AWT
World Trade, Inc.
awt-gpi.com



**Saturn
Rack™**
dryingandstorageracks.com



**GRAPHIC PARTS
INTERNATIONAL INC.**
gpiparts.com



American
awt-gpi.com



GENERAL CYLINDER PRESSES
generalcylinderpresses.com



sales@awtworldtrade.com



www.awt-gpi.com



773.777.7100



773.777.0909